

# Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India P: 9210 903 903, +91 129 4272727, © 93111 24302 E: info@prestogroup.com



Faridabad
 Sonipat
 Kolkata
 Mumbai
 Pune
 Ahmedabad
 Chennai
 Bangalore
 Hyderabad

www.prestogroup.com




### Model No. PSST-0113

Registered Design No. 279111

**Secure Seal Tester** is a consistent tool useful to measure the seal integrity on Pet & Plastic containers. This instrument has been designed to address the special needs of sealed carbonated beverage containers that use plastic caps & closure.

- Operates at working pressure 175 psi compressed air
- Microprocessor based controls
- Automatic sample testing through easy pressure release mechanism
- Pressure, Inlet Pressure setting and Preset Timer functions incorporated for accuracy and repeatability
- Changeable Timer Units in Hrs:min:sec
- Inbuilt Calibration facility
- Digital Pressure display for easy pressure monitoring
- Mild steel powder coated with High tensile plexiglass (with extra safety shield)

By detecting gas leakage rather than liquid, the secure seal tester gives more sensitive and accurate readings. The test sample is closed tightly to check any leakage of gas.

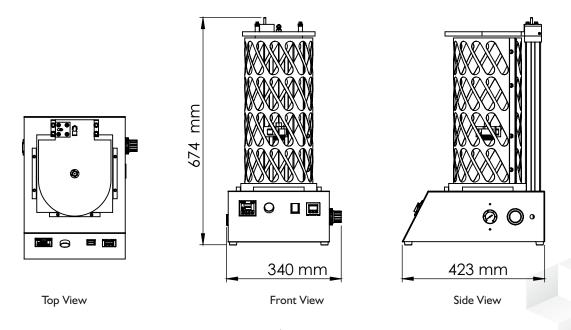



## Presto Stantest Pvt. Ltd.

I-42, DLF Industrial Area Phase-1, Delhi Mathura Road, Faridabad 121003, Haryana, India P: 9210 903 903, +91 129 4272727, S 93111 24302 E: info@prestogroup.com



• Faridabad • Sonipat • Kolkata • Mumbai • Pune • Ahmedabad • Chennai • Bangalore • Hyderabad

www.prestogroup.com

#### **Key Specifications:**

key specifications:	
Controls	Digital for Pressure Monitoring and Timer
Equipment Range	220 psi
T est Range	175 psi
Accuracy	±2% at full range
Least Count/Resolution (Digital Pressure Gauge)	1 PSI
Least Count/Resolution (Input Air line Analog Pressure Gauge)	200 gm/cm <sup>2</sup>
Power	220V , Single phase, 50 Hz
PressureRange Input	Upto 16 bar
InnerDiameter of testing container	200 mm ± 10 mm
Timer	Digital Preset upto 999 seconds
Pressure control	Through inbuilt main line regulator
Pressure Unit	Psi or (Changeable unit Bar, Mpa, Kpa)
Sample Holder	Standard fixture closure depth with Neck 17.8 to 18.3 mm Closure ID 21.4 to 21.74 mm

#### Highlights:

Material	Mild Steel powder coated, High Tensile Plexiglass and Stainless Steel
Finish	Powder coated Havel Gray & Blue combination finish and Mild Steel/Stainless steel for corrosion resistant finish
Dimensions	340 x 423 x 674 mm

• High pressure regulated air line not in our scope of supply

#### **Optional Features:**

- Bottle Neck Cutter for cutting finish of upto 40 mm closure necks.
- Closure fixture other size available as per requirement.

Thank you customers for choosing us as your partners in growth!



























#### **OUR OTHER PRODUCTS:-**















Gloss Meter Triangle Wall Thickness Gauge

**Eccentricity Tester** 

Moisture Analyzer MB 45

Preform Neck Cutter



<sup>\*</sup>All the above logos are the sole property of their respective owners and are used purely for depiction purposes only.